
Adepar® JS

Self adhesive, partial-bonded underlayer for inaccessible roofs





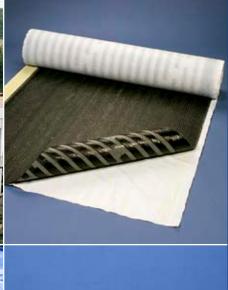

- ▶ Higly resistant to cracking and puncturing due to the SBS elastomeric bitumen binder and its composite reinforcement
- ▶ Reliable partial bonding due to factory-applied adhesive strips

Packaging

Roll: 10m x 1m • Weight: 36 kg Poids: 36 kg

Main uses

- Waterproofing of non-accessible roofs.
- Suitable systems: first layer in the systems Adepar JS + Paradiene 30.1 GS or + Paradiene 40.1 GS.



Adepar® JS



Description

- SBS elastomeric bitumen.
- Polyester composite reinforcement: 140g/m².
- Torchable top face with macro-perforated fusible film and self-adhesive side overlapping (protected by siliconised peel-off film).
- Underfacing with self-adhesive edges and strips, for partial bonding (protected by siliconised peel-off film).
- Thickness: mini 2.5mm.
- Store upright.

Performances

- SBS binder complying with UEAtc Directives.
 - ▶ Finished product (average values):
 - Tensile strength: L x T ≥ 500 x 350 N/5cm;
 - Elongation at first break: L x T ≥ 25 x 30%;
 - ▶ Cold flexibility: ≤ -20°C;
 - ▶ Static puncture resistance: ≥ 15kg;
 - ▶ Dynamic puncture resistance: ≥ 10J;
 - Nail tearing strength: L x T ≥ 200 x 170N.

Application

- Two-layer semi-adhered waterproofing system:
 - On concrete and wooden substrates: old waterproofing, polyurethane surfaced with bitumen/glass fibre or with composite fibres, expanded polystyrene (EM Class);
 - ▶ On concrete slab: 0% slope allowed;
 - ▶ On wooden boarding: slope ≥ 1%;
 - On steel deck: slope ≥ 3%.

Refer to the Adepar JS Technical Agrément.

Complementary information


Adepar JS French Technical Agrément.


Customs nomenclature


■ 68.07.10.19.0.00.0.P

Safety

Adepar JS is not rated dangerous (for the applications described in this document).

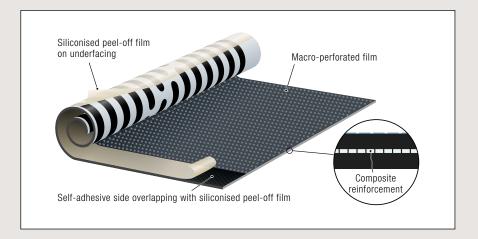

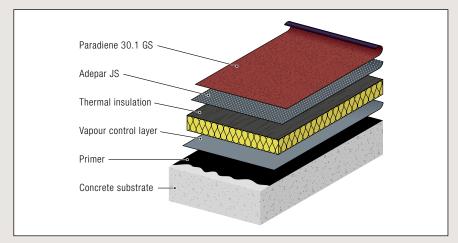

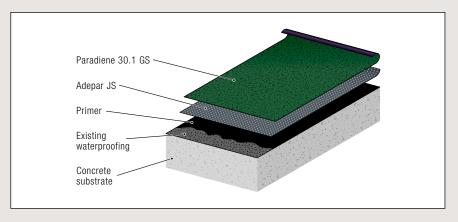

This document is only a guide. Siplast-Icopal reserves the right to change the composition and fixing recommendations of products as a result of evolution of knowledge and technology.



