

Product Technical Information


ITA/214
Rev4 – Mars 2015
Page 1/1

CECEAL

PRESENTATION and SCOPE OF APPLICATION

CECEAL is used as vapour barrier on corrugated steel deck as provided on DTU 43.3.

An Aluminium foil 0,04 mm thick is combined together with Glass mat 60 g/m².

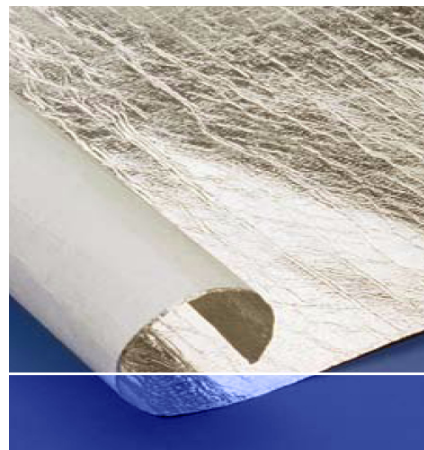

COMPOSITION and CHARACTERISTICS

Thickness aluminium foil		0,040 mm
Water tightness	EN 1928	passed
Water vapour permeability Sd value	EN 1931	>100 m
Behaviour in case of fire EN 13501-1		Class E Class B1
Roll width		1 mt
Roll length		200 mt
Nominal roll weight (kg)		42

Storage : Vertical under cover, away from sources of heat.

Note : This is only an indicative data sheet. ICOPAL SAS reserves the right to modify the formula and the laying instructions, due to technical and experienced improvements.