

## Product Technical Information

ITA 091


Ver 1 – 23/3/17

Pag 1/2

# DALLE PARCOURS

## DESCRIPTION

The DALLES PARCOURS tile has especially been developed in order to prevent damage to the waterproofing against foot traffic on roof walkways during maintenance works.

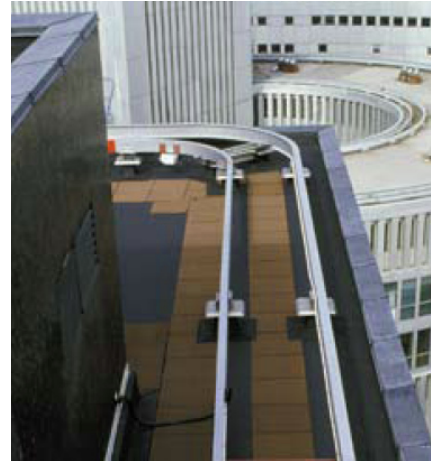

## COMPOSITION

Top surface	Coloured granules or slates.
Blend	Fillerized bitumen
Reinforcement	Two layers of non woven glass
Bottom surface	Thermo-fusible film

## DIMENSIONAL CHARACTERISTICS

COLOURS	Slate grey 30 and Schist light 1		Others colours	
	Nominal value	Critical value	Nominal value	Critical value
Nominal thickness (mm)	6	5.7	6	5.7
Nominal weight per unit	2.52	2.4	2.36	2.24
Size (mm)	500 x 500	498 x 498	500 x 500	498 x 498

## ADVANTAGES

- Economical protection against damage due to maintenance traffic on roofs.
- High resistance against static and dynamic piercing effects.
- High resistance against tear effects.
- High resistance against abrasion due to friction.
- Decorative aspect on the roof when fixed.
- Can easily be replaced when worn after a long period of use.

**Product Technical Information**

ITA 091

Ver 1 – 23/3/17

Pag 1/2

**APPLICATION****SPECIFICATION FOR FIXING**

## ➤ COLD APPLIED :

Maximum slope : 20%

Partial bonding by spots of cold adhesive glue : COLLE PAR

5 spots per tile - 4 at the angles, 1 in the center

Average of consumption : 1.250kg/m<sup>2</sup>

## ➤ HOT APPLIED

Obligatory from 20% slope up to 50%

Fully bonded with hot bitumen (grade 110/30 –115/15).

Consumption : 0.500 kg/m<sup>2</sup>**COMPLEMENTARY INFORMATIONS**

Product identification	NA
Tolerances	The average values derived from standard tests and are subject to the usual production variations. Some slight variations can be noticed as the values are based on the average values obtained from several plants.
Modification(s)	Our company reserves the right to modify its composition as a result of technologic and experiments improvements. This product data sheet supersedes the previous edition, to obtain the up-date technical data sheet, please contact our technical department.
Hazardous classification	It is not classified as dangerous according to the international regulation (ADR, RID, IATA, et RTMDR)
Complementary information	This product is only a product technical data sheet, regarding each waterproofing design, please, consult the concerned technical agreement and in case of doubt contact our technical department.
Storage	This product is packaged on pallet or wooden box. It must be stored under shelter, away from heat sources.