

Metal-faced range

Paradial® S – Supradial® S
Vercuivre® S – Verinox® S



SBS elastomeric bitumen roofing membranes protected by embossed thermo-stable metal foil available in plain or coloured aluminium, copper and stainless steel



- ▶ Long life due to the exceptional retention of the original properties of the SBS elastomeric bitumen
- ▶ High resistance to cracking due to the elasticity of the SBS elastomeric bitumen
- ▶ Insensitivity to thermal shock due to the embossed design of the metal foil “built-in movement joints”
- ▶ A large number of facings: aluminium, copper, stainless steel – range of stove-enamelled colours + plain aluminium for Paradial S
- ▶ Excellent fire rating


Packaging

- **Paradial S:** roll of 8m x 1m ▪ Weight: 34kg
- **Supradial GS:** roll of 7m x 1m ▪ Weight: with slate finishing: 39kg; with granule finishing: 40kg
- **Vercuivre S:** roll of 8m x 1m ▪ Weight: 36kg
- **Verinox S:** roll of 8m x 1m ▪ Weight: 34kg

Main uses

- Cap sheet for the waterproofing of sloping roofs in concrete, metaldeck, wood.
- Waterproofing of upstands, gutters, pipe penetrations and other roof details.
- Two-layer waterproofing systems on all roof decks.
- Waterproofing of non underground reservoirs.

Application*

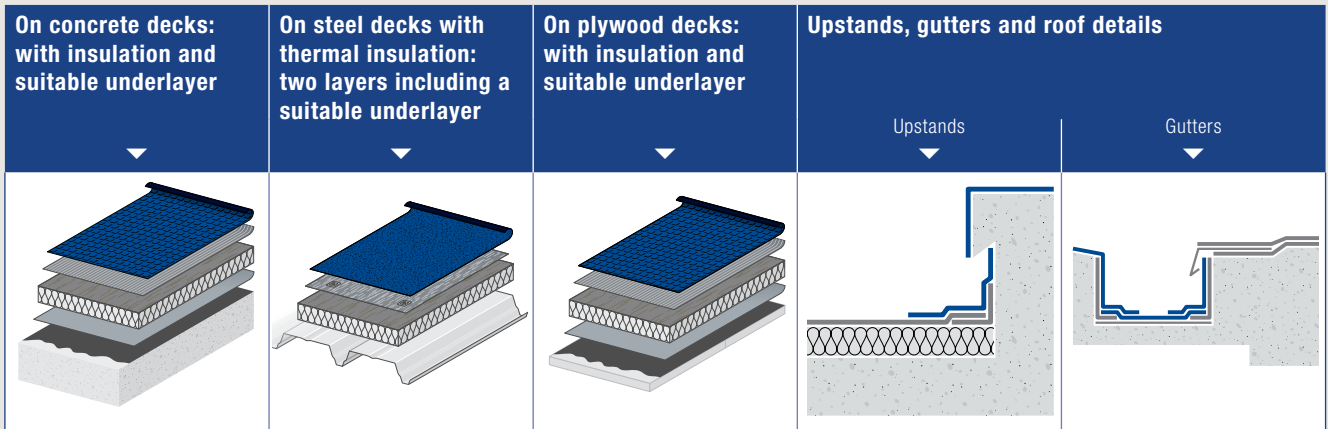


* For Vercuire S over insulation, contact Siplast-Icopal


Description

- SBS elastomeric bitumen binder;
- Composite reinforcement;
- Metal overprotection with expansion compensation system: either aluminium (Paradial S), copper (Vercuire S), or stainless steel (Verinox S);
- Ceramic granules or slate flakes (Supradial S);
- Thermo-fusible film on underface.

Paradial S, Verinox S, Vercuire S

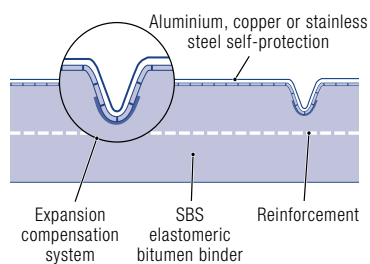

Supradial S

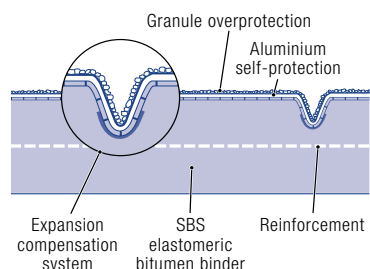

Performances

- Tensile strength: (N/5 cm) 90;
- Elongation at first break: 3%;
- Fire rating: M1 for Paradial S, Verinox S and Vercuire S – M3 for Supradial S (DTU 43.3/French Code of Practice-Art. 1.54 "Fire resistance").

Colours & facings

- Paradial S: plain aluminium;
- Coloured Paradial S: six stove-enamelled colours available for the aluminium facing – white, dark grey, light grey, dark green, light green, dark red;
- Vercuire S: copper (photo 1);
- Verinox S: stainless steel (photo 2);
- Supradial S: with mineral granules or slate flakes – eight colours available (photo 3);
- See the leaflet "Colour on your roofs".

Complementary information

- Installation manual;
- Leaflet: "Colour on your roofs";
- Product data sheet Paradiene (for suitable underlayers);
- Vermetal CSTB Agrément.

Customs nomenclature

- 68.07.10.19.0.00.0.P.

Safety

Paradial S, Supradial S, Vercuire S and Verinox S are not rated dangerous (for the applications described in this document).



This document is only a guide. Siplast-Icopal reserves the right to change the composition and fixing recommendations of products as a result of evolution of knowledge and technology.